





ENERGY-SAVING TOWER UPS



The energy-saving UPS to save up to 93% of power consumption

Designed for home, SOHO office and office applications, the UT Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. The patented GreenPower UPS™ Bypass design achieves ultra-low power consumption to reduce energy costs. The LED indicator shows the utility, battery and operating status of the UPS. Other features include overload protection, EMI filter and configurable alarm to safeguard your devices.

APPLICATION


- Home
- Office
- SOHO Office

SERIES FEATURES

- Line-interactive UPS Topology
- Automatic Voltage Regulation (AVR)
- LED Status Indicator
- Surge and Spike Protection
- Configurable Alarm
- Energy Saving Technology
- Generator Compatible
- Overload Protection
- EMI and RFI Filtration

PRODUCT CALLOUTS

1. Power On/Off Switch
2. LED Status Indicators
3. Battery Backup & Surge Protected Outlets
4. Surge Protected Outlets
5. Input Circuit Breaker
6. AC Input Power Cord

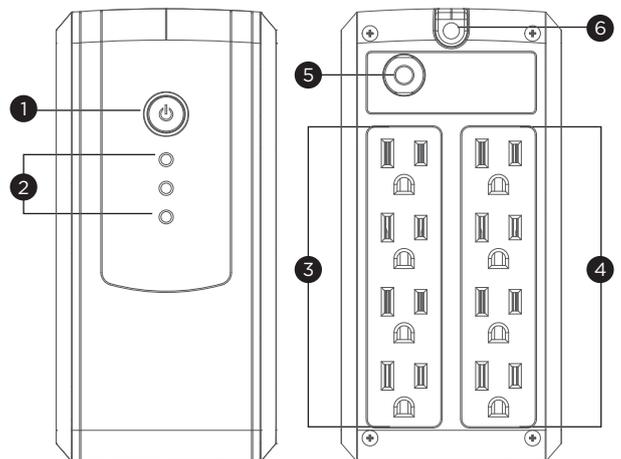

UT550/750/1000G



TECHNICAL SPECIFICATIONS

Model Name	UT550G	UT750G	UT1000G
General			
UPS Topology	Line-interactive	Line-interactive	Line-interactive
Energy Saving Technology	GreenPower UPS™ Bypass Technology	GreenPower UPS™ Bypass Technology	GreenPower UPS™ Bypass Technology
Input			
Generator Compatibility	Yes	Yes	Yes
Nominal Input Voltage (Vac)	120 ± 10%	120 ± 10%	120 ± 10%
Input Voltage Range (Vac)	86 - 148	86 - 148	86 - 148
Input Frequency (Hz)	50 ± 5, 60 ± 5	50 ± 5, 60 ± 5	50 ± 5, 60 ± 5
Input Frequency Detection	Auto-sensing	Auto-sensing	Auto-sensing
Rated Input Current (A)	4.58	6.25	8.33
Input Connector Type	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P
Output			
Capacity (VA)	550	750	1000
Capacity (Watts)	275	375	500
On Battery Waveform	Simulated Sine Wave	Simulated Sine Wave	Simulated Sine Wave
On Battery Voltage(s) (Vac)	120 ± 10%	120 ± 10%	120 ± 10%
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%	50 ± 1%, 60 ± 1%	50 ± 1%, 60 ± 1%
Automatic Voltage Regulation (AVR)	Single Boost, Single Buck	Single Boost, Single Buck	Single Boost, Single Buck
Overload Protection	Circuit Breaker	Circuit Breaker	Circuit Breaker
Outlet(s) - Total	8	8	8
Outlet Type	NEMA 5-15R x 8	NEMA 5-15R x 8	NEMA 5-15R x 8
Outlet(s) - Battery & Surge Protected	4	4	4
Outlet(s) - Surge-Only Protected	4	4	4
Typical Transfer Time (ms)	4	4	4
Battery			
Runtime at 60W (min)	35	39	62
Runtime at 90W (min)	18	23	32
Typical Recharge Time (Hours)	6	6	6
User-replaceable	No	No	No
Battery Type	Sealed Lead-acid	Sealed Lead-acid	Sealed Lead-acid
Surge Protection & Filtering			
Surge Suppression (Joules)	245	245	245
EMI/RFI Filtration	Yes	Yes	Yes
Management & Communications			
LED Indicators	Power On, Line Mode, Battery Mode, Bypass Mode, Low Battery, Overload, UPS Fault		
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault		
Physical			
Form Factor	Tower	Tower	Tower
Physical Size - UPS Module			
Dimensions (WxHxD) (mm.)	84 x 174 x 280	84 x 174 x 280	84 x 174 x 280
Weight (kg.)	3.8	4	4.2
Environmental			
Operating Temperature (°C)	0 - 40	0 - 40	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 90	0 - 90	0 - 90
Online Thermal Dissipation (BTU/hr)	8	8	8
Certifications			
Certifications*	NOM	NOM	NOM
RoHS	Yes	Yes	Yes

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
 #All specifications are subject to change without notice.